


Semi-electric stacker



Residual Capacity at different lifting height

Up to h3 mm	ACTUAL CAPACITY (Q) kg	
1500	1000	500
2500	1000	400
3000	600	300
Load centre distance (C) mm	600	800

1KG=2.2LB 1INCH=25.4MM

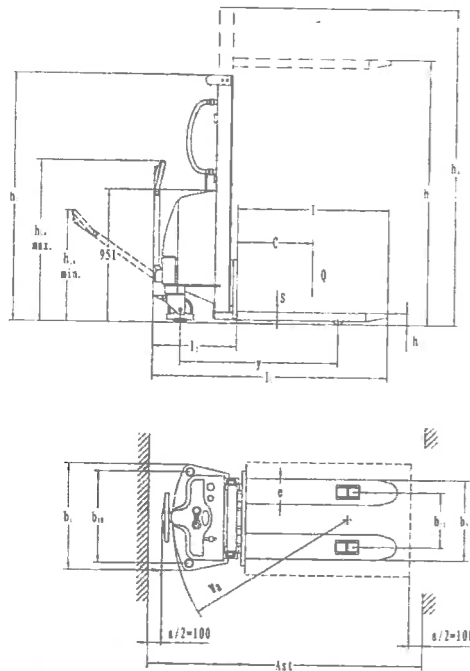

MODEL SPM10

- Strong robust and classical design
- Has an appealing look
- The fluent outline make it stand out from traditional stackers.
- Made of high quality steel to ensure stability and strength.
- Durable and serviceable
- Easy to operate
- Built-in charger.
- Conforms to EN 1757-1

With imported steel for the mast from Germany

Technical Data

1KG=2.2LB 1INCH=25.4MM

		SPM1016	SPM1025	SPM1030	
Characteristics	1.2 Model of manufacture				
	1.3 Drive: (electric-battery or mains,diesel,petrol,fuel gas>manual)	manual	manual	manual	
	1.4 Type of operation (hand,pedestrian,standing,seated,order picker)	pedestrian	pedestrian	pedestrian	
	1.5 Load capacity / rated load Q (kg)	1000	1000	1000	
	1.6 Load centre distance c (mm)	600	600	600	
Weight	1.9 Wheelbase y (mm)	1160	1160	1160	
	2.1 Weight (including battery) kg	410	475	495	
	3.1 Types (solid rubber,superelastic,nylon, polyurethane)	Nylon/PU	Nylon/PU	Nylon/PU	
Wheels Chassis	3.2 Type size,front mm	180x50	180x50	180x50	
	3.3 Type size, rear mm	74x70	74x70	74x70	
	3.5 Wheels,number front/rear	2/4	2/4	2/4	
	3.6 Track width, front b ₁₀ (mm)	658	658	658	
	3.7 Track width, rear b ₁₁ (mm)	390/490	390/490	390/490	
	Basic Dimensions	4.2 Lowered mast height h ₁ (mm)	1980	1830	2080
4.4 Lift height h ₂ (mm)		1600	2500	3000	
4.5 Extended mast height h ₄ (mm)		1980	3070	3570	
4.9 Height of handle min./max. H ₁₄ (mm)		790/1156	790/1156	790/1156	
4.15 Fork height lowered h ₁₅ (mm)		85	85	85	
4.19 Overall length L ₁ (mm)		1720/1570	1720/1580	1720/1580	
4.20 Length to face of forks L ₂ (mm)		610/670	610/670	610/670	
4.21 Overall width b ₁ (mm)		762	762	762	
4.22 Fork dimensions s/e/L (mm)		60/180/1100 60/150/900	60/180/1100 60/150/900	60/180/1100 60/150/900	
4.25 Width over forks b ₂ (mm)		570 330-640	570 330-640	570 330-640	
4.33 Aisle width for pallets 1000×1200 crossways Ast (mm)		2145	2145	2145	
4.34 Aisle width for pallets 800×1200 lengthways Ast (mm)		2175	2175	2175	
4.35 Turning radius Wa (mm)		1280	1280	1280	
Performance		5.2 Lift speed ,laden/unladen mm/s	90/140	90/140	90/140
		5.3 Lowering speed ,laden/unladen mm/s	120/100	120/100	120/100
	5.11 Parking brake	manual	Manual	Manual	
E-Motor	6.2 Lift motor rating at S ₂ 15% kw	1.5	1.5	1.5	
	6.4 Battery voltage ,nominal capacity K ₂ V/Ah	12/150	12/150	12/150	
	6.5 Battery weight kg	45	45	45	